


TERMINALS SUITABLE FOR 22-16 AWG (0.6mm² - 1.3mm²) FIELD WIRING
 TIGHTENING TORQUE = 0.8Nm (7lb-in)

NOTE 1
 A 120 OHM TERMINATION RESISTOR MUST BE FITTED IF IT IS THE FIRST OR LAST DEVICE ON AN RS485 LINK

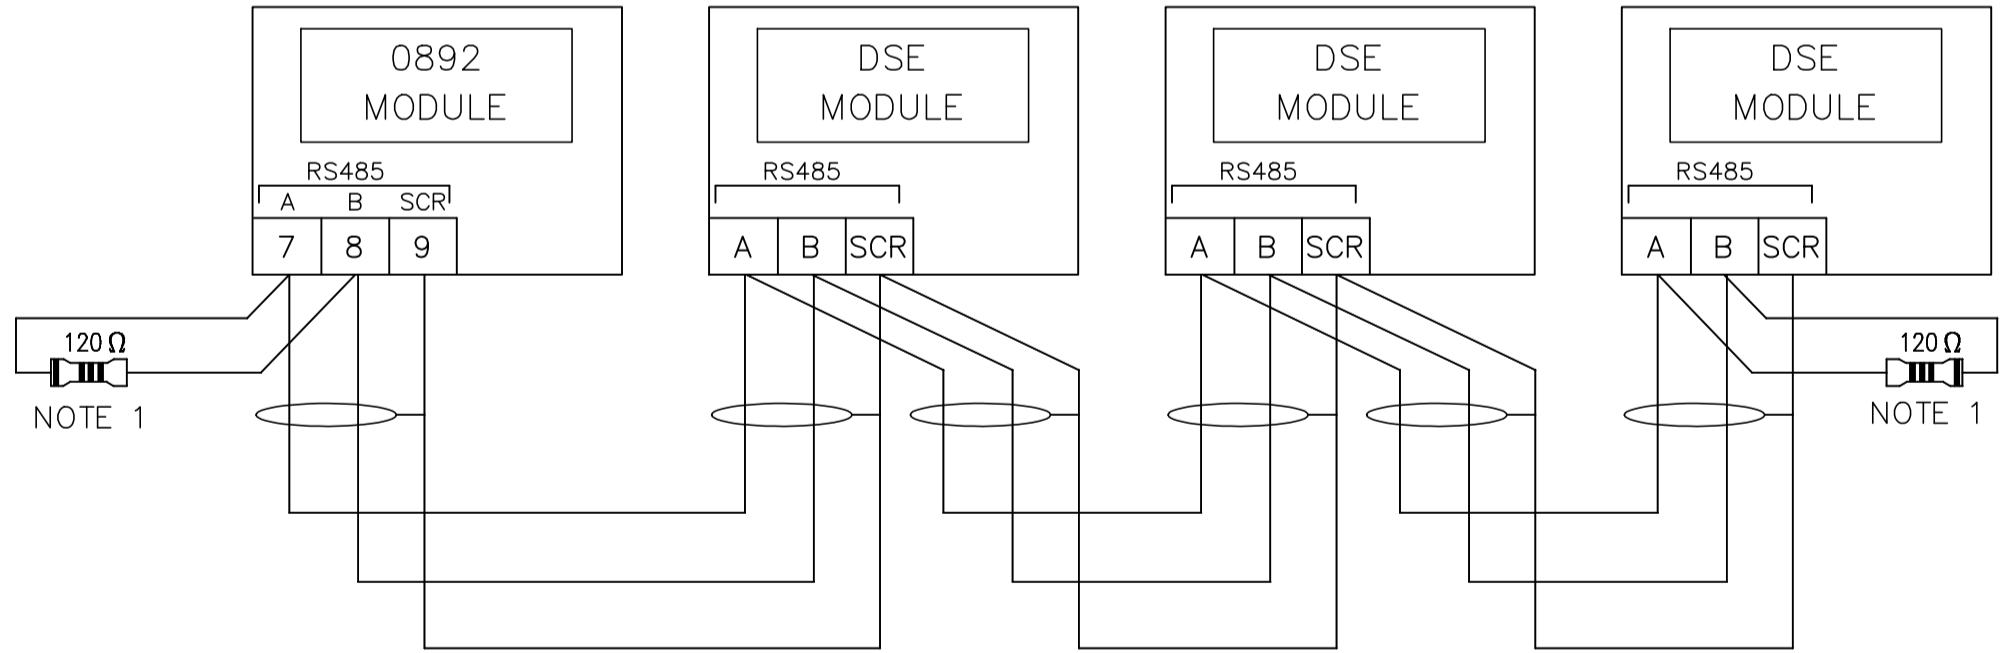

NOTE 1
 A 120 OHM TERMINATION RESISTOR MUST BE FITTED TO THE FIRST AND LAST DEVICE ON AN RS485 LINK

UNITS = NA						DSE		DEEP SEA ELECTRONICS PLC HIGHFIELD HOUSE HUNMANBY INDUSTRIAL EST. N. YORKSHIRE, YO14 0PH	
TOLERANCE	REVISION	DATE	TITLE	TYPICAL CONNECTIONS		0892 SNMP GATEWAY			
NA	CHK.			No. 035-176		ISS No. 1		SHEET 1/1	
	CHK. PG	22/01/13	DWG						
	DRN. IAS	22/01/13	No.						