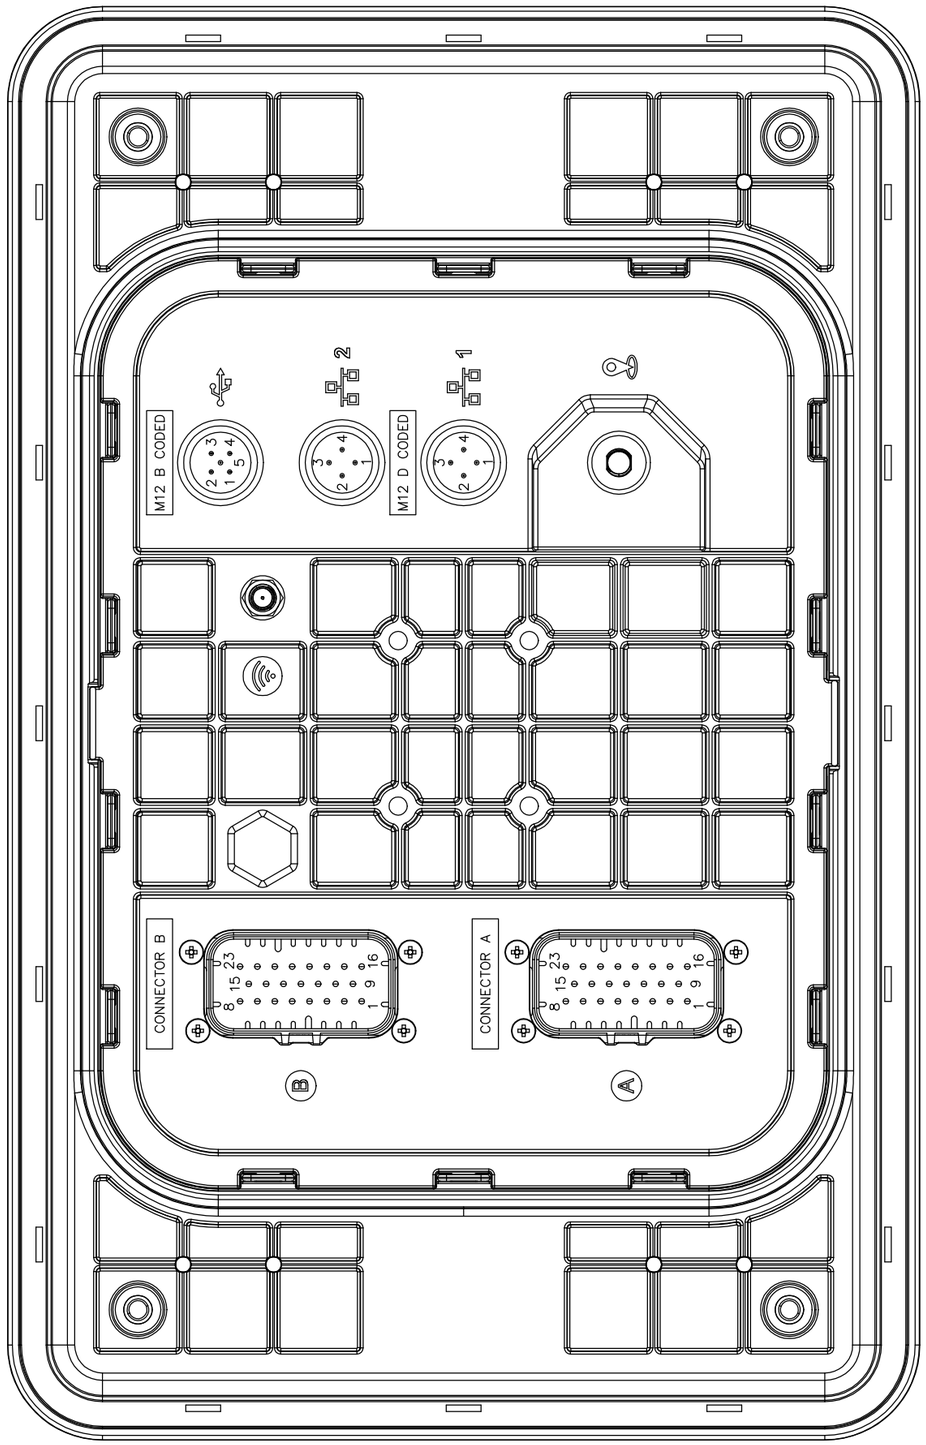

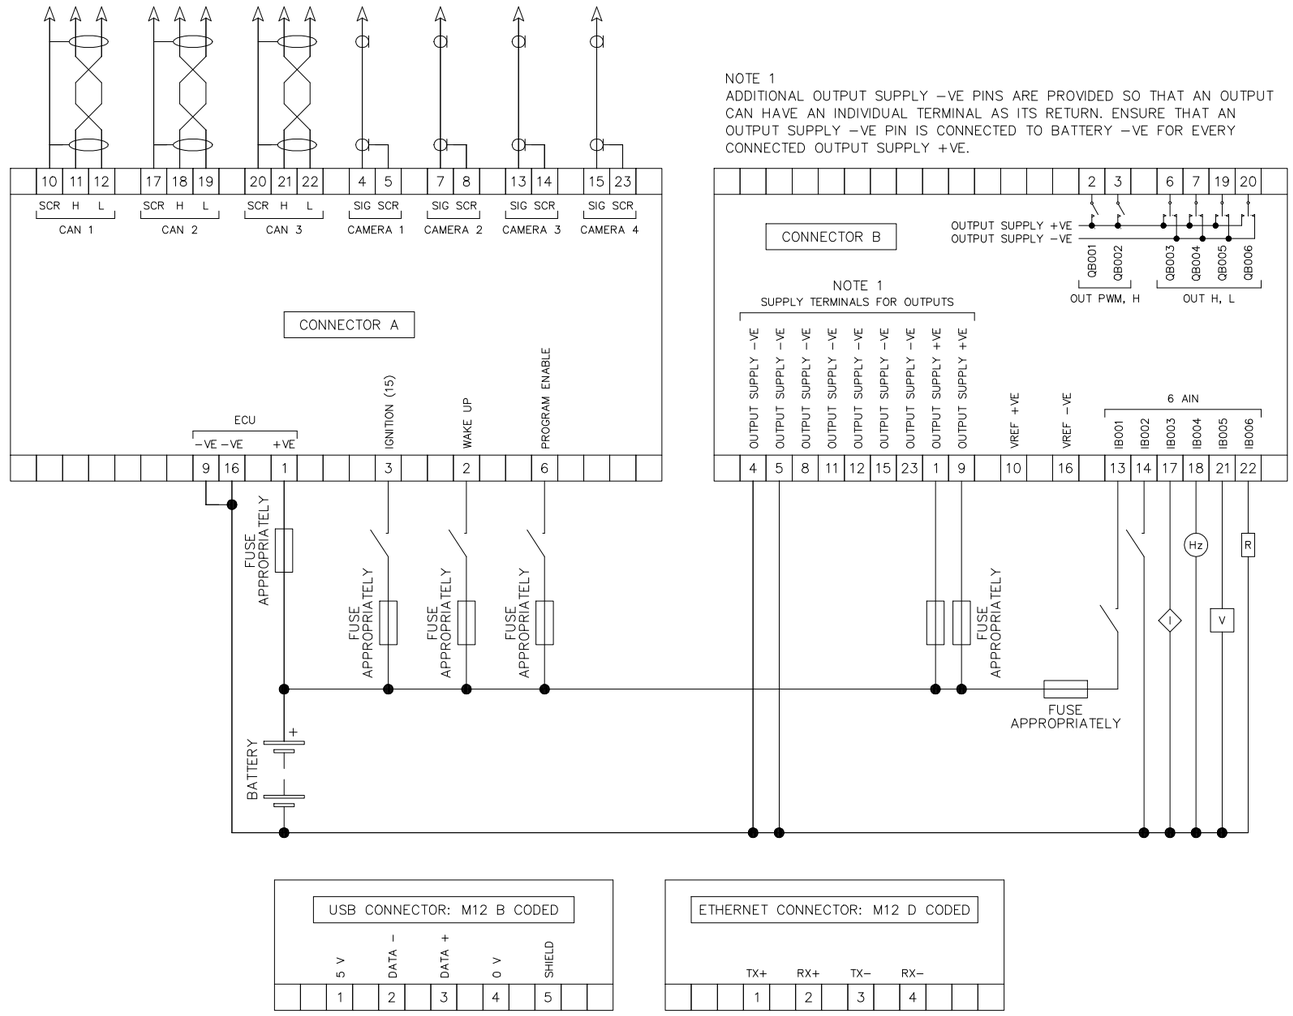

ABBREVIATIONS	
OUT PWM, H	OUTPUT CAN BE CONFIGURED AS A PWM OR DIGITAL HIGH−SIDED
OUT H, L	OUTPUT CAN BE CONFIGURED AS DIGITAL HIGH−SIDED OR LOW−SIDED
AIN	ANALOGUE INPUT CAN BE CONFIGURED AS A POSITIVE DIGITAL, NEGATIVE DIGITAL, FREQUENCY INPUT, VOLTAGE, CURRENT OR RESISTIVE SIGNAL
VREF +VE	5V OR 10V SUPPLY, E.G. FOR EXTERNAL ANALOGUE SENSORS
VREF −VE	NEGATIVE REFERENCE FOR THE ANALOGUE INPUT CHANNELS

UNITS = NA			DEEP SEA ELECTRONICS PLC HIGHFIELD HOUSE HUNMANBY INDUSTRIAL EST. N. YORKSHIRE, YO14 0PH	
	AS	10/03/22		
	AS	03/04/20		
	AS	01/04/20	TITLE: TYPICAL CONNECTIONS M812	
TOLERANCE NA	REVISION / CHK.	DATE		
	CHK.		DWG No. 035−279	ISS No. 4
	DRN. AS	19/12/18		SHEET 1/1