PROPRIETARY AND CONFIDENTIAL

This document is the property of Phillips & Temro Industries, Ltd. and contains proprietary and trade secret information. The recipient of this document agrees to use the information contained herein only for the purpose for which it was furnished by Phillips & Temro Industries, Ltd. and agrees not to copy or disclose this information without prior written approval. This notice shall appear on any complete or partial reproduction of this document.

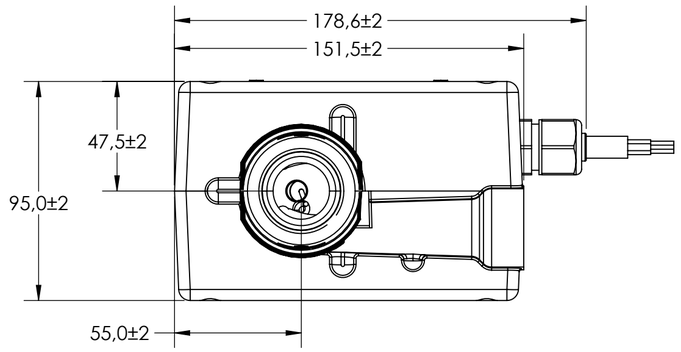

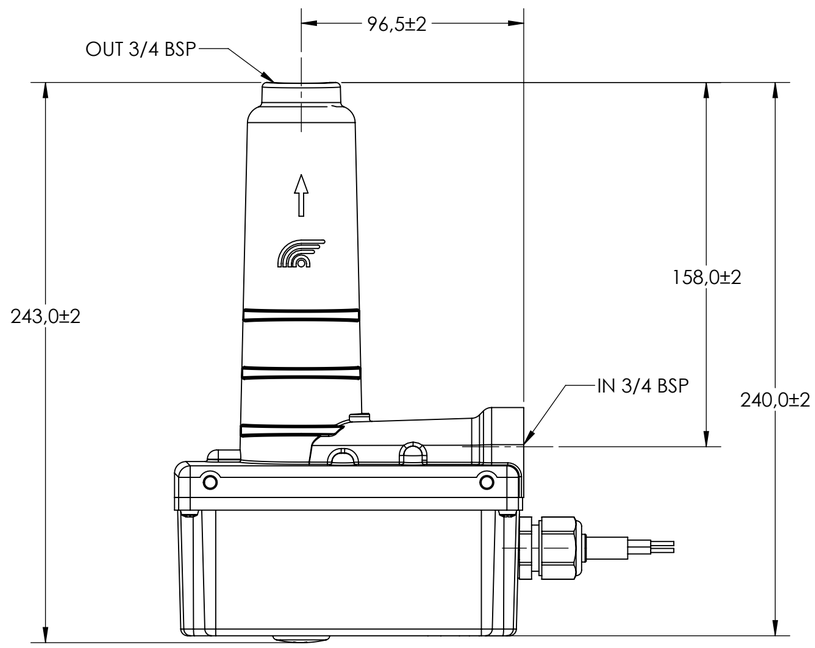

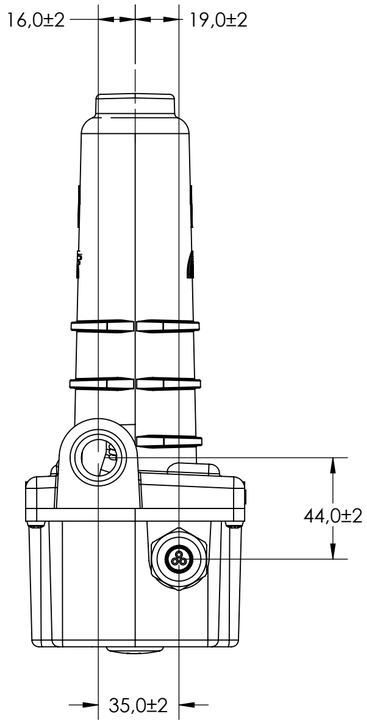

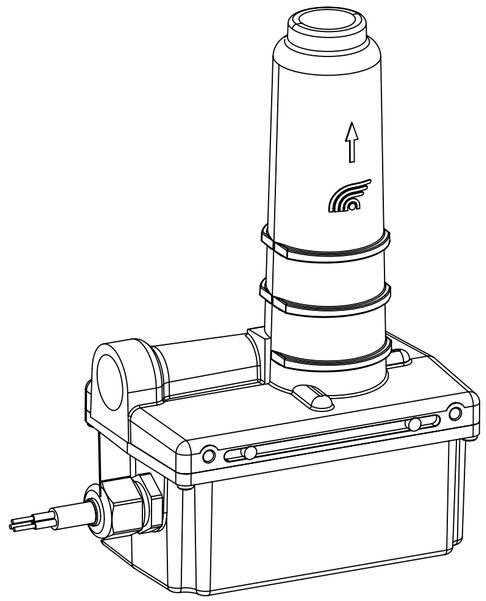

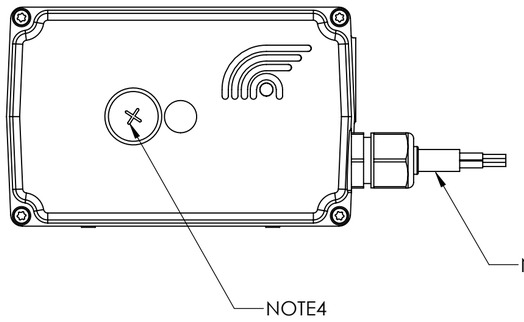

NOTES:
1: RATING : 4000 WATTS NOMINAL @ 230 VOLTS AC NOMINAL
2: 17.8 AMPS NOMINAL
3: REGULATING THERMOSTAT : 35-50°C/95-122°F ADJUSTABLE
4: SAFETY THERMOSTAT 110°C/230°F WITH MANUAL RESET
5: POWER CABLE 2m PIGTAIL
6: INDIVIDUALLY PACKED

REV.	ECO#	DESCRIPTION	DATE	BY / APPR
A		FIRST RELEASE	19/06/14	SL / NLU

REVISIONS

PHILLIPS & TEMRO industries

CAD SOURCE: SOLIDWORKS

DIMENSIONS ARE IN: ☐ INCHES ☒ MILLIMETERS ☐ INCHES[MM]

UNLESS SPECIFIED DIMENSION TOLERANCES ARE

ANGLES	INCHES	MILLIMETERS
±1 °	(X.X) ±	(X.) ± 1
	(X.XX) ±	(X.X) ± .5
	(X.XXX) ±	(X.XX) ± .25

THIRD ANGLE PROJECTION

MATERIAL: SEE BOM

SPECIAL CHARACTERISTICS	
T	INSPECTION
F	FIT/FUNCTION
S	SAFETY/COMPLIANCE

DATE: 19/06/14 | DRAWN BY: SL

SCALE: 1:2 | APPROVED BY: NLU

DESCRIPTION: THG,4KW, 230, 1 PH

DWG ORIGIN: EDEN PRAIRIE | SIZE: C | SHEET 1 OF 1 | PART No.: THG230140003550M | REV: A