© All rights reserved by Robert Bosch GmbH, including patent rights.
All rights of use and of reproduction and publication
rest with ROBERT BOSCH GmbH.

Further foreign langu. drawings

注：红色标注处为需接线针脚。

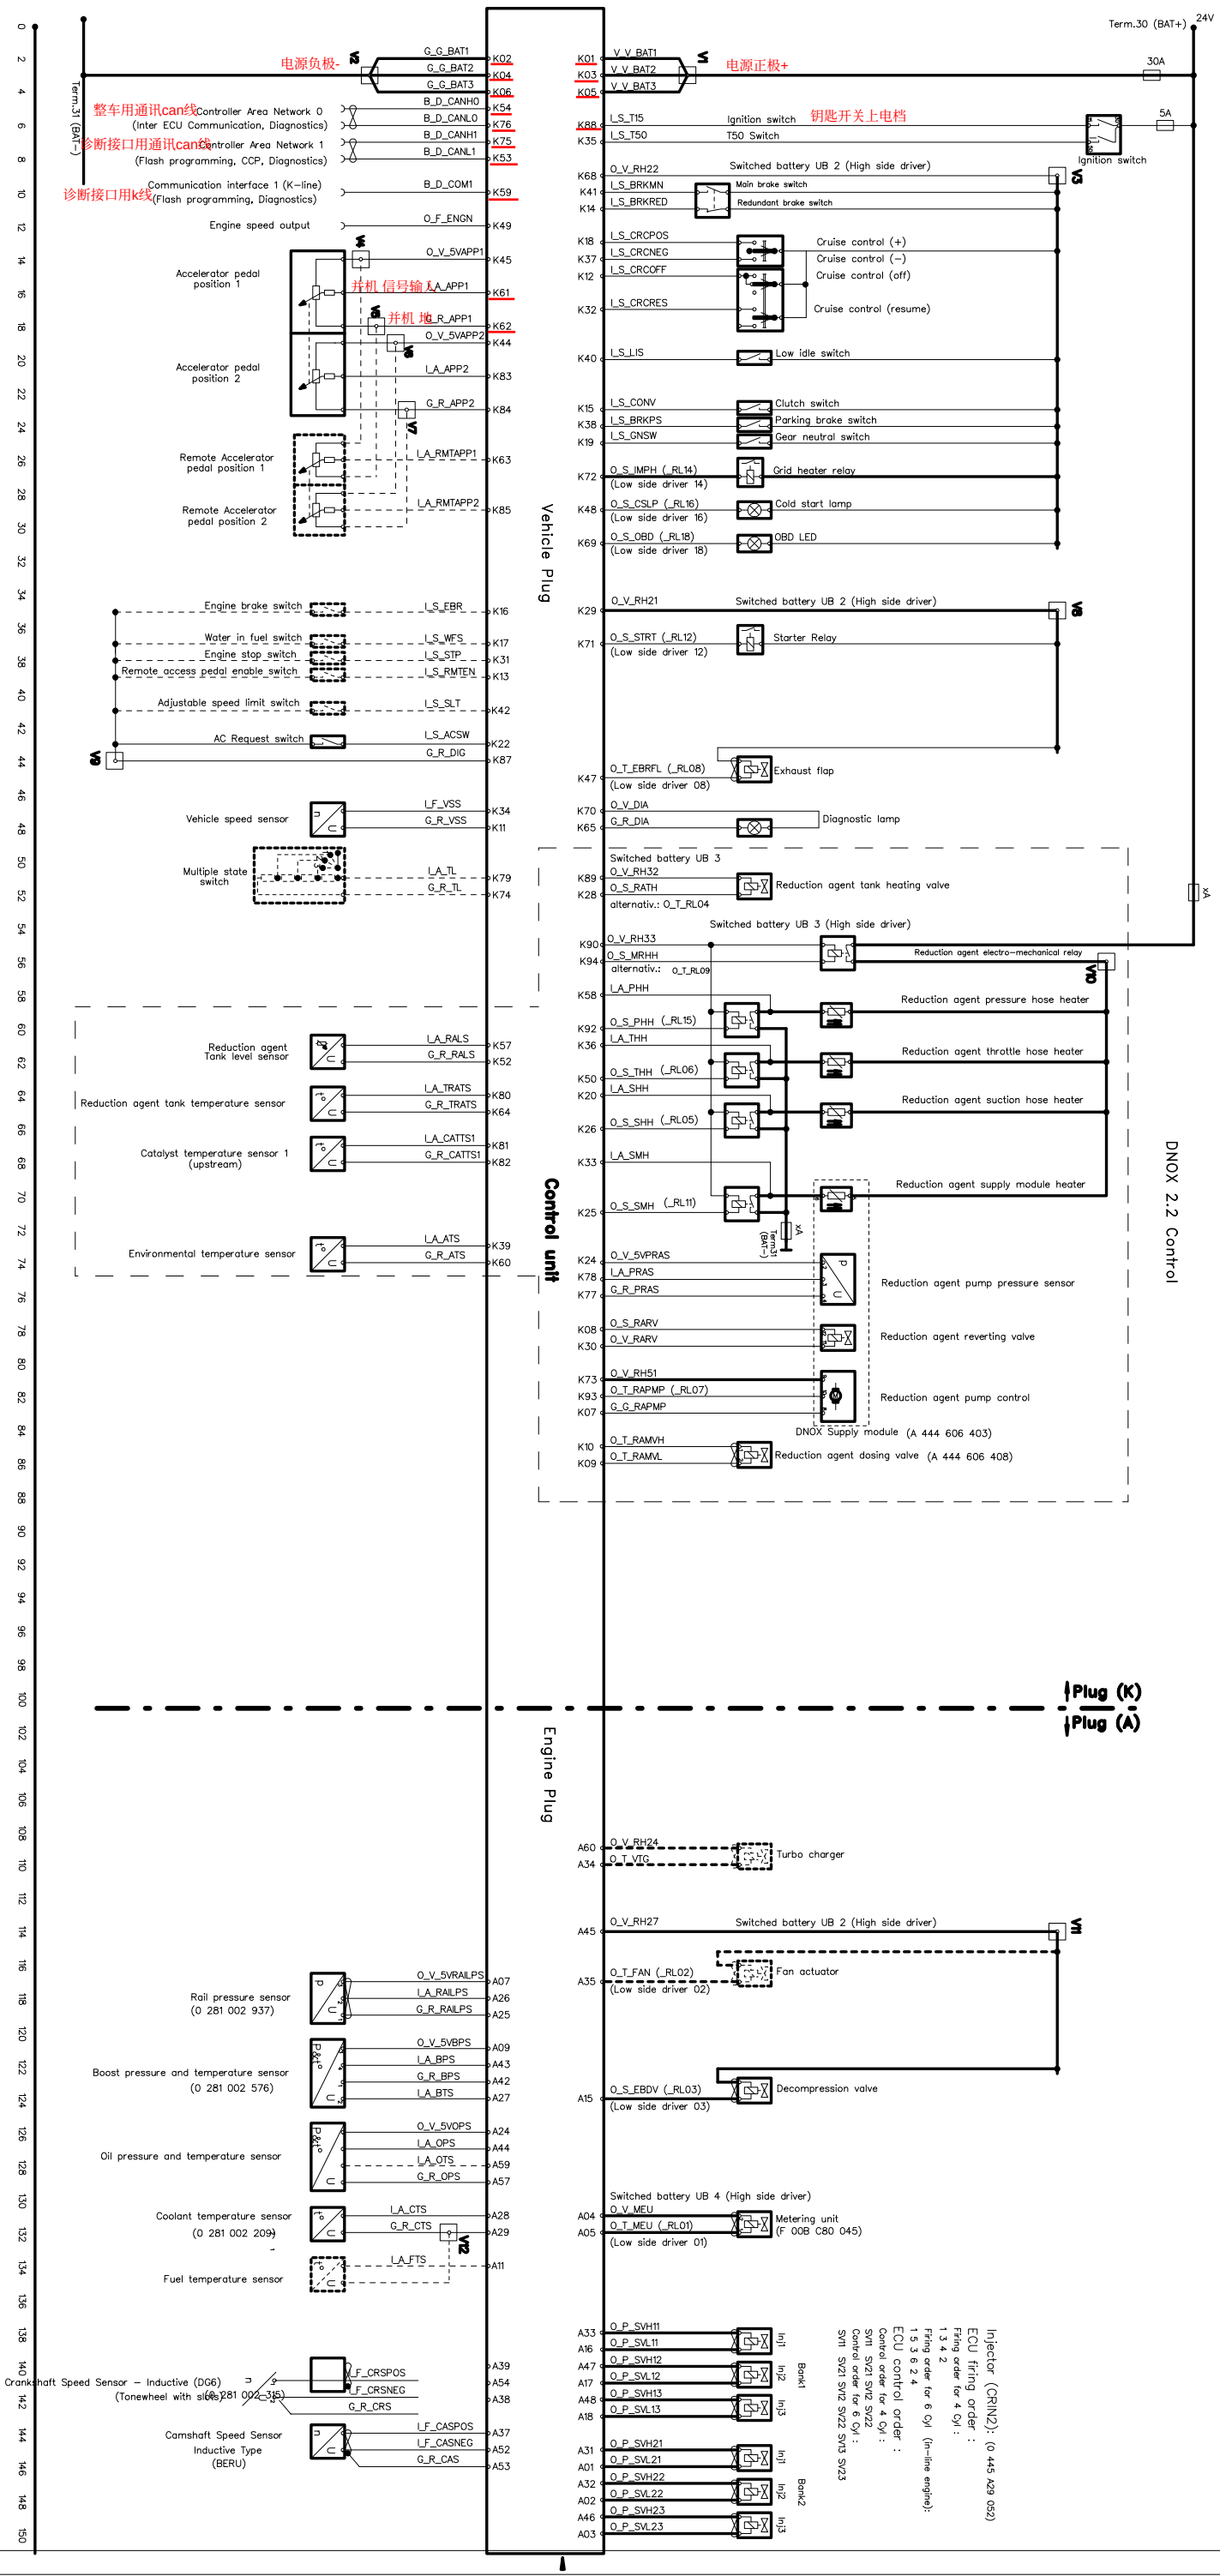

Injector (CRIN2): (0 445 A29 052)
ECU firing order :
Firing order for 4 Cyl :
1 3 4 2
Firing order for 6 Cyl (in-line engine):
1 5 3 6 2 4
ECU control order :
Control order for 4 Cyl :
SV11 SV21 SV12 SV22
Control order for 6 Cyl :
SV11 SV21 SV12 SV22 SV13 SV23

0 462 YU4 0A9

Remarks:
Wiring Harness Guidelines(Injection system):
Responsible: DGS-EC/EHM1 Y 445 R90 633

= twisted pair recommended
also recommended for 462 YU3 actuators
Vx = Butt connector
- - - = optional function
Connector

ECU Pin Nomenclature.:

I_A_XXXX	Analog input
I_S_XXXX	Digital input
I_F_XXXX	Frequency input
O_F_XXXX	Frequency output
O_S_XXXX	Low side (ON/OFF)
O_T_XXXX	PWM output
O_P_SVHXY	Injector output high side
O_P_SVLXY	Injector output low side
O_V_XXXX	Supply voltage
B_D_XXXX	Bi-directional line

(X represents the Bank Number)
(Y represents the Injector number)

"For the function of the ECU the vehicle configuration according to the terminal diagram is mandatory."
Fuse arrangement is only a proposal. Electrical system is in customer responsibility.

No.	Revisions	dr.	valid	ck.
05	Chang: position of LIS, EBR			
04	Chang: Pin no swap	Ag	Nov/30/2012	Ag
03	Add: Turbo charger	Pr	Nov/15/2012	Arm
02	Add: Fan speed sensor	Pr	Jul/16/2012	Arm
		Pr	Nov/23/2011	Arm

Rev. drawing not distributed externally/

Non tolerance measure/ ISO E
± mm, ± °
Scale
Weight
Gr. St.
dr/ Date/
dv/ Name/
dpv/
Designation/
DDE Deutz
Orig. Original:
DIN A1
ROBERT BOSCH GmbH Postfach 30 02 40 70442 STUTTGART
Pr. Dr. Schwarz
Arm. Arnold
Prüfnummer
Achtshenk
No./
Terminal diagram
Supvers. No/ DS-SX/EPS1
EDC17CV44 4/-5.B3
Sheet
Sh/

YU4 0A9