
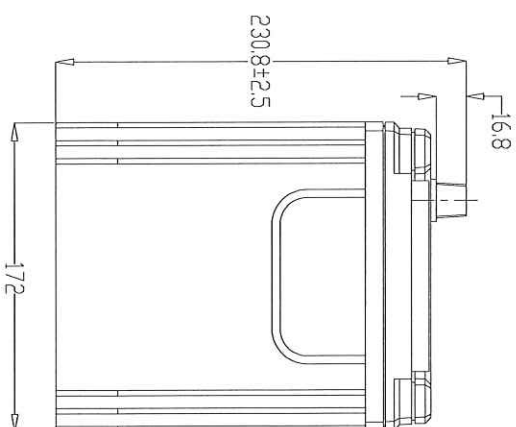
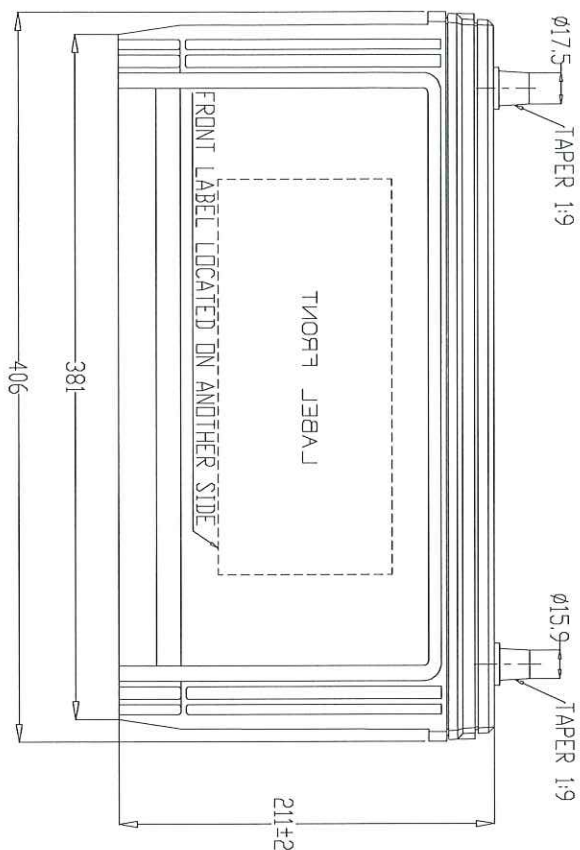


TOP VIEW DIMENSIONS ARE FROM EDGE OF COVER-INT

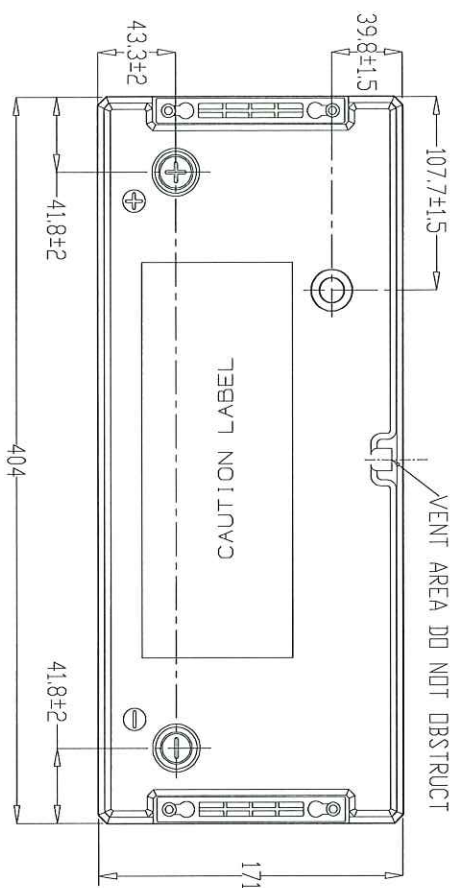

APPLICATION DATA

JCI MODEL NAME: 6-QW-120GB50-1
GROUP SIZE: 1100

PERFORMANCE RATINGS:
COLD CRANKING AMPERES AT -18°C 12 VOLTS
20 HOUR RATE AMP HR (REF) 850 AMPS
120 AH

RECOMMENDED MAXIMUM CHARGING OR OPERATING TEMPERATURE 52°C

INSTALLATION INSTRUCTIONS:

RECOMMENDED TERMINAL TORQUE SPECIFICATIONS:
TOP TERMINAL POST 5.6-7.9(N.m)

RECOMMENDED RETAINER TORQUE SPECIFICATIONS:
BASE CLAMP 15-20(N.m)
TOP BAR/FRAPE 2.3-4.5 (N.m)

张一成

Xichuan Duan

2023.4.3

DATE	REV	BY	CHK	REVISION HISTORY	DATE	BY	CHK
2023.04.03	01			6-QW-120GB50-1	2023.04.03		
2023.04.03	01			GROUP NAME CHANGE	2023.04.03		

THIS GROUP IS A STANDARD WITH THE FOLLOWING SPECIFICATIONS: 1. TERMINAL POST: 5.6-7.9(N.m) 2. BASE CLAMP: 15-20(N.m) 3. TOP BAR/FRAPE: 2.3-4.5 (N.m) 4. RETAINER TORQUE: 15-20(N.m) 5. GROUP SIZE: 1100 6. PERFORMANCES: 12 VOLTS, 850 AMPS, 120 AH 7. RECOMMENDED MAXIMUM CHARGING OR OPERATING TEMPERATURE: 52°C		CLAROS GROUP NAME: 6-QW-120GB50-1 GROUP SIZE: 1100 PERFORMANCES: 12 VOLTS, 850 AMPS, 120 AH RECOMMENDED MAXIMUM CHARGING OR OPERATING TEMPERATURE: 52°C	
ALL DIMENSIONS ARE IN MILLIMETERS ZERO PLACE DECIMALS: 1 ONE PLACE DECIMALS: 0.5 ANGLES: 1°		BATTERY OUTLINE 30017212	