


TOP VIEW DIMENSIONS ARE FROM EDGE OF COVER-INT


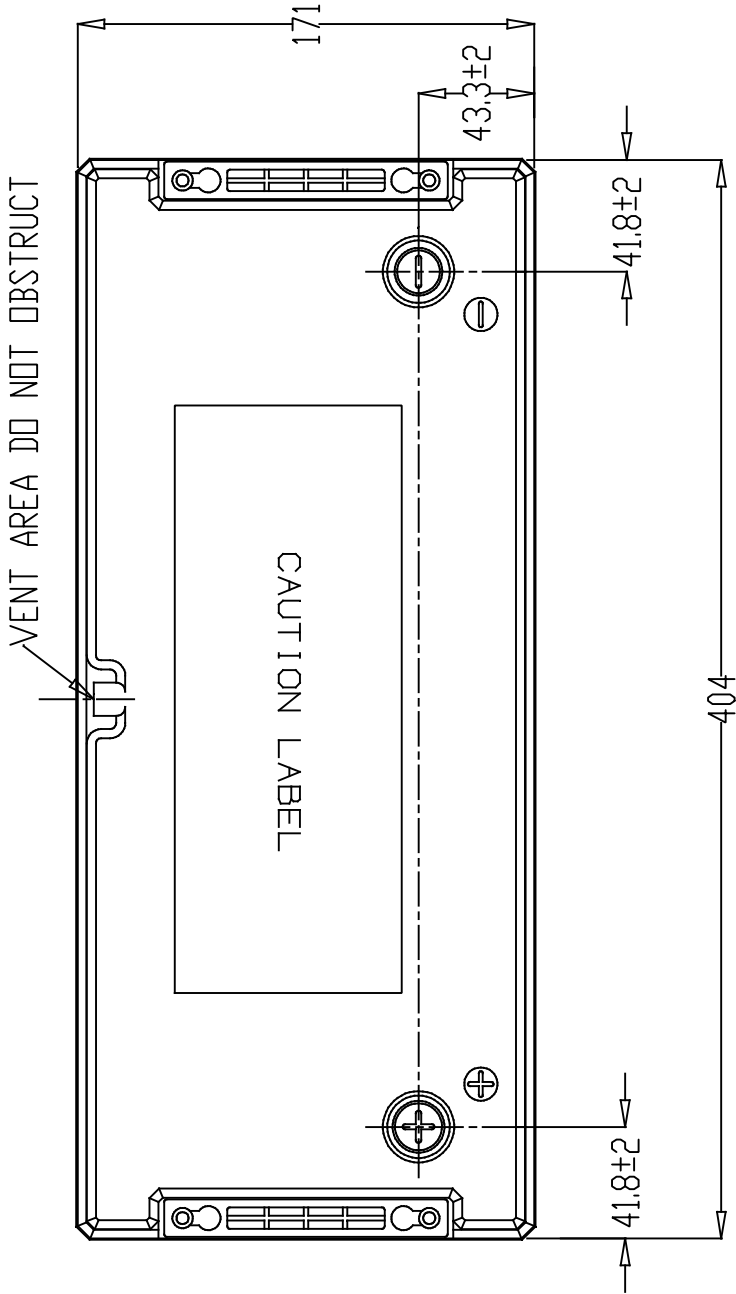


APPLICATION DATA

GROUP SIZE: E41

PERFORMANCE RATINGS:
COLD CRANKING AMPERES AT -18°C 740 AMPS
RESERVE CAPACITY AT 25°C : 185 MIN
RECOMMENDED MAXIMUM CHARGING OR OPERATING TEMPERATURE 52°C

INSTALLATION INSTRUCTIONS:
RECOMMENDED TERMINAL TORQUE SPECIFICATIONS:
TOP TERMINAL POST $5.6\sim 7.9(\text{N.m})$
RECOMMENDED RETAINER TORQUE SPECIFICATIONS:
BASE CLAMP $15\sim 20(\text{N.m})$
TOP BAR/FRAME $2.3\sim 4.5(\text{N.m})$

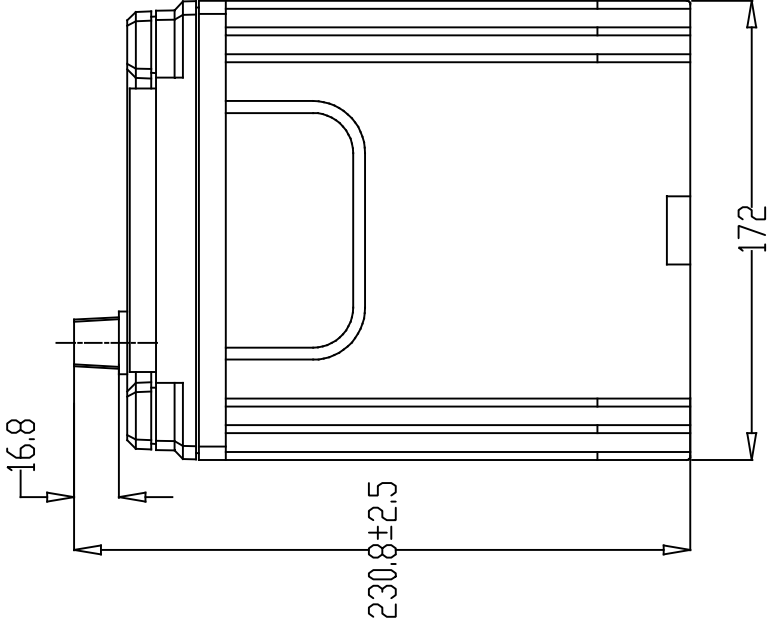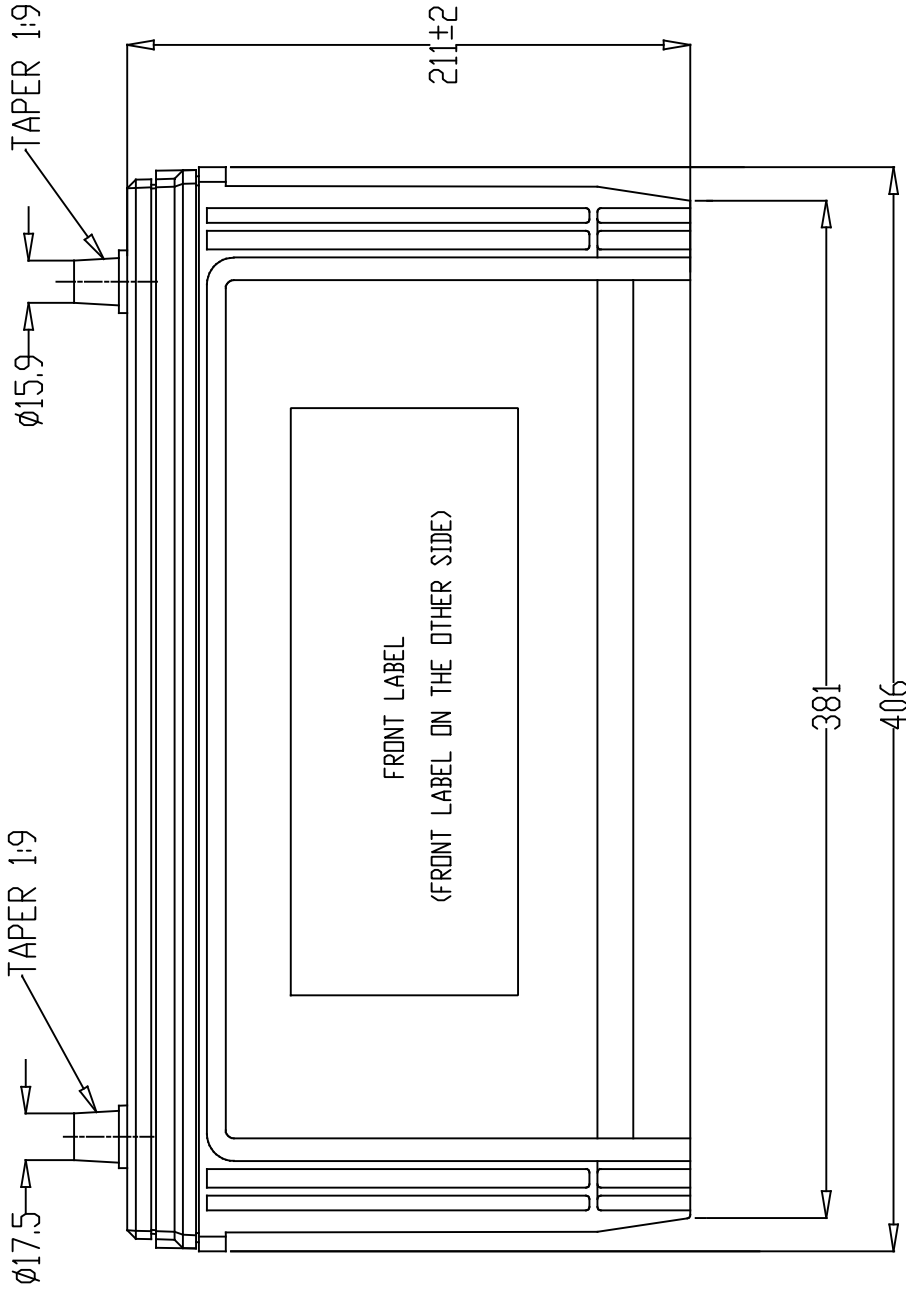

WITH TERMINAL PROTECTOR



Customer CONFIDENTIAL and PROPRIETARY Information.
Dissemination or use of this document or any information herein is prohibited without the express written permission of CLARIOS. All rights reserved.
CLARIOS

DATE	20N022	REV	00	ZONE		REVISION HISTORY	SIZE	E41	506234	SIZE	E2 DMC
------	--------	-----	----	------	--	------------------	------	-----	--------	------	--------

DATE	20N022	REV	00	ZONE		REVISION HISTORY	SIZE	E41	506234	SIZE	E2 DMC
------	--------	-----	----	------	--	------------------	------	-----	--------	------	--------

DATE	20N022	REV	00	ZONE		REVISION HISTORY	SIZE	E41	506234	SIZE	E2 DMC
------	--------	-----	----	------	--	------------------	------	-----	--------	------	--------

DATE	20N022	REV	00	ZONE		REVISION HISTORY	SIZE	E41	506234	SIZE	E2 DMC
------	--------	-----	----	------	--	------------------	------	-----	--------	------	--------

DATE	20N022	REV	00	ZONE		REVISION HISTORY	SIZE	E41	506234	SIZE	E2 DMC
------	--------	-----	----	------	--	------------------	------	-----	--------	------	--------